

AXIS 207/207W/207MW Network Cameras

True bandwidth-efficient MPEG-4 network cameras

The AXIS 207 Network Cameras offer compact and cost-effective solutions for indoor surveillance and remote monitoring. The AXIS 207 family provides the best image quality in its class, with excellent performance even in low light conditions. It offers VGA resolution with AXIS 207/207W, and if greater detail or wider field of view is required, Megapixel resolution with AXIS 207MW.

The AXIS 207 Network Cameras also provide the best bandwidth efficiency, thanks to its MPEG-4 implementation that includes motion estimation. Simultaneous MPEG-4 and Motion JPEG streams allow systems to be optimized for both image quality and bandwidth. The built-in microphone enables remote users to not only view, but also listen in on an area and increase the monitoring options.

Thanks to the built-in Web server, the AXIS 207 Network Cameras can be monitored from a standard browser on a Windows computer or a Macintosh. In addition to the included AXIS IP Utility tool for Windows, the cameras support both UPnP and Bonjour, for easy location on the network in a Windows or Macintosh environment.

Video can be recorded directly from the Web interface or via the included video management software. Video can also be uploaded over FTP, email or HTTP when the camera detects motion or is triggered by a sensor connected to the alarm input.

The AXIS 207W/207MW Network Cameras are supplied with both wireless IEEE 802.11g and Ethernet network interfaces for flexible installation. They support the WPA (Wi-Fi Protected Access) and WPA2 protocols to provide the best security for wireless networks. The wide coverage provided by the high-performance wireless functionality gives the freedom to place the camera where required, instead of being restricted to network outlets.

These network cameras are ideal for securing small businesses, home offices and residences over a local area network or the Internet.



- Superior image quality with up to 12 frames per second in 1.3 Megapixel resolution (AXIS 207MW) or up to 30 in VGA (AXIS 207/207W)
- Simultaneous Motion JPEG and MPEG-4 for optimized quality and bandwidth
- Built-in microphone for synchronized audio
- Wireless IEEE 802.11g and Ethernet for flexible installation (AXIS 207W/207MW)
- Built-in Web server for monitoring via standard browser on Windows or Mac

AXIS 207/207W/207MW Network Cameras

Specifications


Models	AXIS 207: VGA, wired interface AXIS 207W: VGA, wired and wireless interface AXIS 207MW: Megapixel, wired and wireless interface	Power	AXIS 207: 4.9-5.1 V DC, max 2.5 W AXIS 207W: 4.9-5.1 V DC, max 3.5 W AXIS 207MW 4.9-5.1 V DC, max 4.0 W
Image sensor	AXIS 207/207W: 1/4" Micron Progressive Scan RGB VGA CMOS AXIS 207MW: 1/3" Micron Progressive Scan RGB 1.3 Megapixel CMOS	Operating conditions	5-50 °C (41-122 °F) Humidity 20 - 80% RH (non-condensing)
Lens	AXIS 207/207W: 4.0 mm, F2.0, fixed iris, focus range: 0.5 m to infinity AXIS 207MW: 3.6 mm, F1.8, fixed iris, focus range: 0.5 m to infinity	Installation, management and maintenance	Installation tool on CD and Web-based configuration Configuration backup and restore Video management software for recording Firmware upgrades over HTTP or FTP, firmware available at www.axis.com
Angle of view	AXIS 207/207W: 55° horizontal AXIS 207MW: 74° horizontal	Video access from web browser	Camera live view, video recording to file (ASF), customizable HTML pages
Light sensitivity	AXIS 207/207W: 1-10000 lux, F2.0 AXIS 207MW: 2-10000 lux, F1.8	Minimum web browsing requirements	Pentium III CPU 500 MHz or higher, or equivalent AMD 128 MB RAM AGP graphics card 32 MB RAM, Direct Draw Windows XP, 2000, DirectX 9.0 or later Internet Explorer 6.x or later Mac OS X 10.3 or later and Safari 1.3 or later with QuickTime plugin Other MPEG-4/AAC players supported: Packet Video, QuickTime, RealPlayer standalone and browser plug-ins, Windows Media Player For other operating systems and browsers see www.axis.com/techsup
Video compression	Motion JPEG MPEG-4 Part 2 (ISO/IEC 14496-2) with motion estimation, profiles: Simple Profile, level 0-3, and Advanced Simple Profile, level 0-5	System integration support	Open API for software integration including AXIS VAPIX API*, AXIS Media Control SDK*, event trigger data in video stream and NAT traversal. Quality of Service (QoS) Layer 3, DiffServ Model. Embedded Linux operating system <i>*Available at www.axis.com</i>
Resolutions	AXIS 207/207W: 7 resolutions up to 640x480 AXIS 207MW: 15 resolutions up to 1280x1024	Supported protocols	IPv4, HTTP, TCP, ICMP, QoS, RTSP, RTP, UDP, IGMP, RTCP, SMTP, FTP, DHCP, UPnP, Bonjour, ARP, DNS, DynDNS, SOCKS, NTP Additional protocols in AXIS 207W/MW: IPv6, HTTPS, SSL/TLS*, SNMPv1/v2c/v3 (MIB-II) More information on protocol usage available at www.axis.com <i>*This product includes software developed by the Open SSL Project for use in the Open SSL Toolkit</i>
Frame rate	AXIS 207/207W: Up to 30 fps in all resolutions AXIS 207MW: Up to 14 fps in resolutions up to 1280x720, up to 12 fps in 1280x1024	Accessories (included)	Power supply, stand, clamp, connector block, Installation Guide, CD with installation tool, software and User's Manual, AXIS Camera Explorer license, MPEG-4 licenses (1 encoder, 1 decoder), MPEG-4 decoder (Windows)
Video streaming	Simultaneous Motion JPEG and MPEG-4 Controllable frame rate and bandwidth 3GPP and ISMA compatible	Video management software (not incl.)	AXIS Camera Station - Video management software for viewing, recording and archiving up to 25 cameras See www.axis.com/partner/adp_partners.htm for more software applications via partners
Image settings	Compression levels: 100 Rotation: 0°, 180° Configurable color level, brightness, contrast, white balance Overlay capabilities: time, date and text	Accessories (not incl.)	AXIS 207: Indoor vandal-resistant housing MPEG-4 Decoder multi-user license pack
Shutter time	AXIS 207/207W: 1/2 - 1/10000 second AXIS 207MW: 1/10 - 1/10000 second	Approvals	AXIS 207: EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 61000-6-1, FCC Part 15 Subpart B Class B, ICES-003 Class B, VCCI Class B, C-tick AS/NZS 3548, EN 60950 AXIS 207W/207MW: EN 300328, EN 301489, FCC Part 15 Subpart B & C Class B, ICES-003 Class B, RSS210, VCCI Class B, TELEC, C-tick AS/NZS 4771, MIC, EN 60950 Power supply: EN 60950, UL, CSA
Audio	Built-in microphone for one-way audio Audio compression: AAC LC 8-32 kbit/s, G.711 PCM 64 kbit/s, G.726 ADPCM 32 or 24 kbit/s (AXIS 207W/207MW)	Dimensions (HxWxD) and weight	AXIS 207: 85 x 55 x 34 mm, (3.3" x 2.2" x 1.3"), 177 g (0.39 lb) incl. stand, excl. power supply AXIS 207W/207MW: 85 x 55 x 40 mm (3.3" x 2.2" x 1.6") antenna not included, 190 g (0.42 lb) incl. stand, excl. power supply
Wireless interface (AXIS 207W/207MW)	IEEE 802.11g 6 - 54 Mbps IEEE 802.11b 1 - 11 Mbps Transmit power: 20-22 dBm* (FCC), 11-14 dBm (CE)** Receiver sensitivity: -90 dBm at 1 Mb Modes: Infrastructure and ad-hoc Antenna gain: 1.6 dBi <i>*Peak; without antenna gain; **Avg; without antenna gain</i>		
Security	Multiple user access levels with password protection AXIS 207W/AXIS 207MW: IP address filtering, HTTPS encryption WEP 64/128 bit, WPA-PSK*, WPA2-PSK* <i>*infrastructure mode only</i>		
Users	10 simultaneous unicast users Unlimited users using multicast (MPEG-4)		
Alarm and event management	Events triggered by video motion detection, audio detection or external input Upload of MPEG-4 video or Motion JPEG images over FTP, email and HTTP Notification via email, HTTP and external output Pre- and post alarm buffering in MPEG-4 file up to 4 MB (AXIS 207/207W) / 2 MB (AXIS 207MW)		
Connectors	Ethernet 10BaseT/100BaseTX, Auto-MDIX (AXIS 207W/207MW), RJ-45 Terminal block for 1 alarm input, 1 output and alternative power connection		
Processors and memory	CPU, video processing and compression: ARTPEC-A RAM: 32 MB, Flash: 4 MB (AXIS 207), 8 MB (AXIS 207W/207MW)		



AXIS 207/207W/207MW Network Camera with camera stand - stand included



AXIS 207/207W/207MW Network Camera with flexible clamp - clamp included

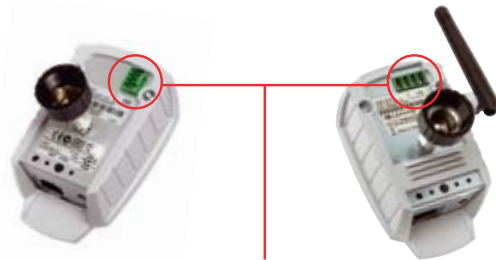

The four-pin terminal connector provides the interface to 1 alarm input, 1 output and alternative power connection. It can be used for connecting e.g. an external alarm device for triggering an alarm notification via email.